




产品细节



@产品尺寸

2 外形及安装尺寸

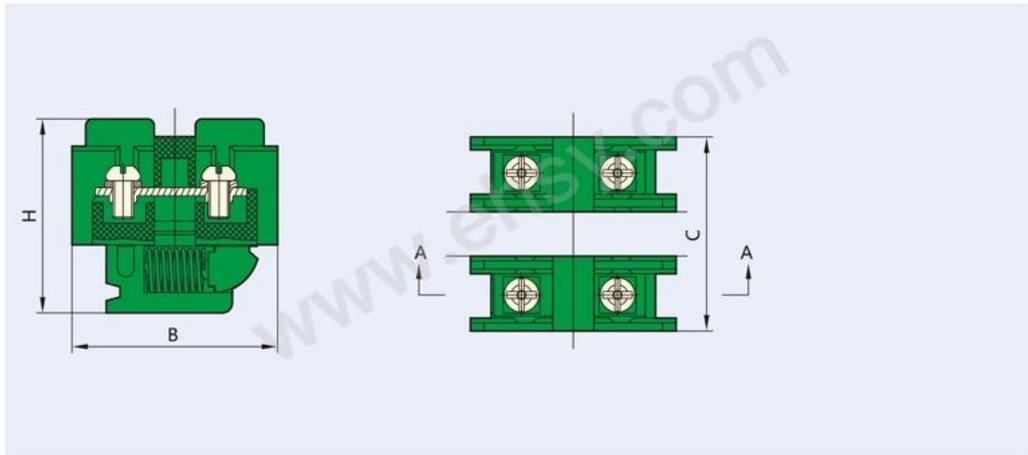

序号	产品型号	外形尺寸(mm)		
		B	C	H
1	JF5-1.5/1	30	8	28.5
2	JF5-1.5/10	30	130.8	35.6
3	JF5-1.5/2	30	19.2	28.5
4	JF5-1.5/3	30	28.5	28.5
5	JF5-1.5/5	30	46.5	29
6	JF5-2.5/1	34	10	31
7	JF5-2.5/10	35.1	161	36
8	JF5-2.5/2	34.5	24.5	30.5
9	JF5-2.5/3	34.8	35.8	30.5
10	JF5-2.5/5	35	58.8	31.5
11	JF5-2.5S3/1	60.5	10.5	54.5
12	JF5-2.5S3/10	60.5	155	61
13	JF5-2.5RD/1	46.5	20	51
14	JF5-2.5RD/10	46.5	258	57.4
15	JF5-6/1	45	14.5	41
16	JF5-6/10	45	195	47
17	JF5-6/2	44	33	40
18	JF5-6/3	44	48	40
19	JF5-6/5	44	80	41
20	JF5-10/1	49.5	17.1	47.5
21	JF5-10/10	49.5	225	56.5
22	JF5-10/2	50	38	47.5
23	JF5-10/5	50	91.2	47.5
24	JF5-25/1	59.2	21.5	50
25	JF5-25/10	60	282	52
26	JF5-25/2	60	47.5	50

@产品应用

JF5 系列

1 适用范围

JF5系列底座封闭型接线座适用于频率为50Hz或60Hz，额定电压至660V，额定截面积为1.5~25mm²的圆铜导线作连接之用。本系列产品采用螺钉压接连接，导线端头需压接接线鼻后才能与接线端子连接。采用G型导轨安装。

符合标准：GB/T 14048.7、IEC 60947-7-1。