



产品介绍



PV6-14R-T

环接线端子,大线,6 AWG, 1/4"螺栓尺寸,乙烯绝缘。

◎ 产品特点

环舌设计确保在高振动应用安全连接

金属绝缘握套压接工具与线绝缘，为高振动应用中的压接点提供保护

内筒锯齿状确保导线良好接触和最大张力强度

UL 可燃性 UL 94V-2/HB，最高绝缘温度 221°F (105°C)

获得 UL 认证和 CSA 认证，根据 UL 486A/B 额定电压高达 600 伏（如适用）

◎ 技术参数

螺栓孔尺寸 (英寸)	NA
绝缘材料	聚乙烯
剥线长度 (毫米)	11.11
剥线长度 (英寸)	0.43
最高电压 (伏特)	600
饰面/涂层	锡
颜色代码	蓝色
宽度 (毫米)	11.9
机身长度 (毫米)	17.5
机身长度 (英寸)	0.69
电缆类型	锡
绝缘直径 (毫米)	8.6
绝缘直径 (英寸)	0.34
最高工作温度 (华氏度)	NA
最高工作温度 (摄氏度)	NA
最大线绝缘直径 (毫米)	8.6
最大线绝缘直径 (英寸)	0.34
总长度 (毫米)	41.9
总长度 (英寸)	1.65
总宽度 (英寸)	0.47
舌片长度 (毫米)	24.3
舌片长度 (英寸)	0.96
舌片厚度 (毫米)	1.1
舌片厚度 (英寸)	0.05
舌片宽度 (英寸)	0.47
子品牌	典型Pv-R
产品类型	接线端子
长度 (英寸)	1.65


◎ 选型指南



Ring Terminal, Large Wire, Vinyl Insulated

Type PV-R

- Ring tongue design assures a secure connection in high vibration applications
- Insulation support helps to prevent wire damage in bending applications
- Brazed seam protects terminal barrel from splitting during the crimp process
- Internal barrel serrations assure good wire contact and maximum tensile strength
- UL Flammability UL 94V-0, maximum insulation temperature 221°F (105°C)
- UL rated up to 600 V per UL 486A/B



Part Number	Wire Range	Color Code	Stock Thickness (In.)	Max. Ins. (In.)	Stud Size	Figure Dimensions (In.)			Recommended Installation Tool	Std. Pkg. Qty.**	Std. Ctn. Qty.
						L	W	C			
PV8-8R-QY	8 AWG	Red	0.04	0.280	#8	1.51	0.42	0.43	CT-720, CD-720PV8-2†, CT-2600, CD-2600-PV8†	25	250
PV8-8RN-Q			0.04	0.280	#8	1.48	0.36	0.43		25	250
PV8-10R-QY			0.04	0.280	#10	1.53	0.47	0.43		25	250
PV8-14R-QY			0.04	0.280	1/4"	1.53	0.47	0.43		25	250
PV8-56R-QY			0.04	0.280	5/16"	1.64	0.59	0.49		25	250
PV8-38R-QY			0.04	0.280	3/8"	1.64	0.59	0.51		25	250
PV8-12R-XY	6 AWG	Blue	0.04	0.280	1/2"	1.74	0.82	0.51	CT-720, CD-720PV8-2†, CT-2600, CD-2600-PV6†	10	100
PV6-8R-E			0.05	0.340	#8	1.61	0.47	0.43		20	200
PV6-10R-X			0.05	0.340	#10	1.62	0.47	0.43		10	100
PV6-14R-X			0.05	0.340	1/4"	1.65	0.47	0.48		10	100
PV6-56R-X			0.05	0.340	5/16"	1.74	0.62	0.53		10	100
PV6-38R-X			0.05	0.340	3/8"	1.74	0.62	0.51		10	100
PV6-12R-X	4 AWG	Yellow	0.05	0.340	1/2"	1.84	0.82	0.51	CT-720, CD-720PV8-2†, CT-2600, CD-2600-PV4†	10	100
PV4-10R-E			0.05	0.450	#10	1.88	0.55	0.50		20	200
PV4-14R-E			0.05	0.450	1/4"	1.88	0.55	0.50		20	200
PV4-56R-E			0.05	0.450	5/16"	1.95	0.68	0.50		20	200
PV4-38R-E			0.05	0.450	3/8"	1.95	0.68	0.50		20	200
PV4-12R-E			0.05	0.450	1/2"	2.04	0.86	0.50		20	200
PV2-10R-XY	2 AWG	Red	0.06	0.560	#10	1.96	0.68	0.58	CT-720, CD-720PV8-2†, CT-2600, CD-2600-PV2†	10	100
PV2-14R-XY			0.06	0.560	1/4"	1.96	0.68	0.58		10	100
PV2-56R-XY			0.06	0.560	5/16"	1.96	0.68	0.58		10	100
PV2-38R-XY			0.06	0.560	3/8"	1.96	0.68	0.58		10	100
PV2-12R-XY			0.06	0.560	1/2"	2.05	0.86	0.58		10	100

**Bulk packaging may be available, contact Panduit® Customer Service for additional information.

†UL approved tooling/product combinations. For crimping tool information see www.panduit.com/tools.


◎ 产品尺寸

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	STUD SIZE	DIMENSIONS - in.					TOOLS
		A ±.03	B ±.01	C ±.02	M ±.03	H ±.01	
PV6-8R	#8	1.61 (40.89)	.47 (11.94)	.43 (10.92)	1.38 (35.05)	.18 (4.57)	CT-720 (CD-720PV8-2)
PV6-10R	#10	1.62 (41.15)	.47 (11.94)	.43 (10.92)	1.38 (35.05)	.20 (5.08)	
PV6-14R	1/4"	1.65 (41.91)	.47 (11.94)	.48 (12.19)	1.38 (35.05)	.27 (6.86)	
PV6-56R	5/16"	1.74 (44.20)	.62 (15.75)	.53 (13.46)	1.44 (36.58)	.33 (8.38)	CT-2600 (CD-2600-PV8)
PV6-38R	3/8"	1.74 (44.20)	.62 (15.75)	.51 (12.95)	1.44 (36.58)	.40 (10.16)	
PV6-12R	1/2"	1.84 (46.74)	.82 (20.83)	.51 (12.95)	1.44 (36.58)	.52 (13.21)	

NOTES:

1. cULus LISTED FOR:
A. 600V MAX VOLTAGE RATING
B. 221° F (105° C) MAX TEMP RATING
C. #6 AWG STRANDED COPPER WIRE
2. SEE WWW.PANDUIT.COM FOR PACKAGE QUANTITIES
3. MATERIAL:
A. STAMPING - .045" (1.14) THK, COPPER
TIN PLATED
B. HOUSING - VINYL, BLUE
4. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS
5. WIRE STRIP LENGTH: 7/16 + 1/32 (11.1 + .8)
- 0 - 0

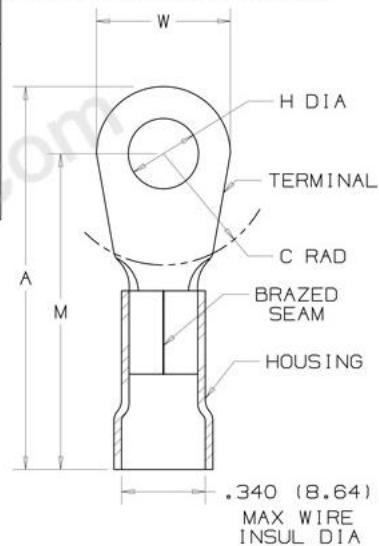

◎ 品牌授权



泛达网络科技（上海）有限公司

Authorization No. SH - IEI - 20230003

授权书



兹授权 伟域智慧供应链（上海）股份有限公司 通过其电商平台
(www.ehsy.com) 销售泛达公司（PANDUIT）选定产品，参与 MRO 电
子商务平台销售；

- 1、电子商务平台分销区域以华东区域为主，涉及其他区域请提前向泛达报备
- 2、电子商务平台的销售价格由泛达（PANDUIT）统一提供，涉及促销以及降价活动事先与泛达销售沟通

本授权书仅授权其通过电子商务平台（www.ehsy.com）销售，有效期为授权之日起至 2023 年 12 月 31 日。本授权书的最终解释权归属泛达网络科技（上海）有限公司。

泛达网络科技（上海）有限公司

二〇二三年六月六日

